

Item:
SDL6-14W-40K-WH-MS
SDL6-14W-50K-WH-MS



DISK LIGHT WITH MOTION SENSOR INSTALLATION INSTRUCTIONS

READ AND FOLLOW ALL SAFETY INSTRUCTIONS!

WARNING

- Make all electrical and ground connections in accordance with local codes or the National Electrical Code. If you are not familiar with these codes and requirements, consult a qualified electrician. This Professional should be familiar with the construction and operation of this product and hazards involved. Failure to do so may result in serious personal injury.
- To reduce the risk of fire, electric shock, personal injury, or property damage, please read and follow all safety instructions. If you do not understand these instructions or if any additional information is required, contact your local Topaz representative. Retain these instructions for maintenance reference.
- Do not exceed the allowed supply voltage marked on the luminaire label information.
- Disconnect power at the circuit breaker panel before any installation.

CAUTION

- Do not expose wire to any sharp objects such as sheet metal to prevent wiring damage or abrasion.
- While the light is on, please avoid direct eye exposure.
- Combustible material should be kept away from fixture/LENS.
- Do not make or alter any open holes in any enclosure or any electrical component during installation.
- Do not use when the enclosure is damaged or broken in any way.
- Do not alter, relocate or remove wiring, lamp holder power supply or any other electrical component.
- This device is not intended to be used with any emergency lighting fixture.

Model	Input Voltage	Frequency	Power	Rated Current
SDL6-14W-xxK-WH-MS	120V	60Hz	14W	0.13A

INCLUDED ACCESSORIES BAG



Wire Connector
Qty: 3 pcs
P3




x2

Junction Box Screw
Stainless Steel



x2




Mounting Plate
Qty: 1 pc

Item:
SDL6-14W-40K-WH-MS
SDL6-14W-50K-WH-MS



DISK LIGHT WITH MOTION SENSOR INSTALLATION INSTRUCTIONS

Installation:

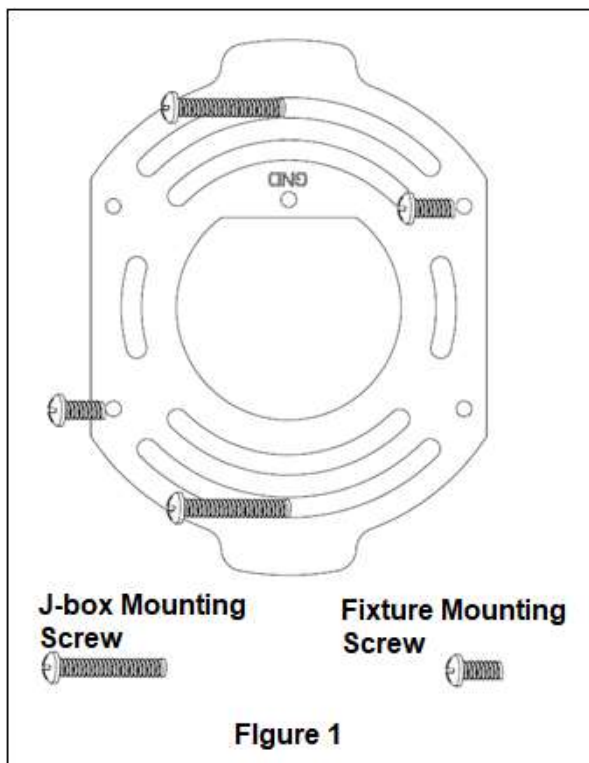

1. Turn off electrical power before beginning any electrical work.
2. Attach the mounting plate to the junction box using the slotted spaces on the mounting plate and supplied screws. Do not tighten all the way. Pull wires through the center of the mounting plate as shown in Figure 1.


****Note: Mounting plate is optional and can be used to adapt to 3"- 4" junction box, as well as can be rotated to achieve optimal sensor aiming. Sensor should be aimed towards the area most motion will occur for optimal results.***

3. Install 2 short screws into the mounting plate in opposite corners. Do not tighten, only catch the threads. See Figure 1

Item:
SDL6-14W-40K-WH-MS
SDL6-14W-50K-WH-MS



DISK LIGHT WITH MOTION SENSOR INSTALLATION INSTRUCTIONS

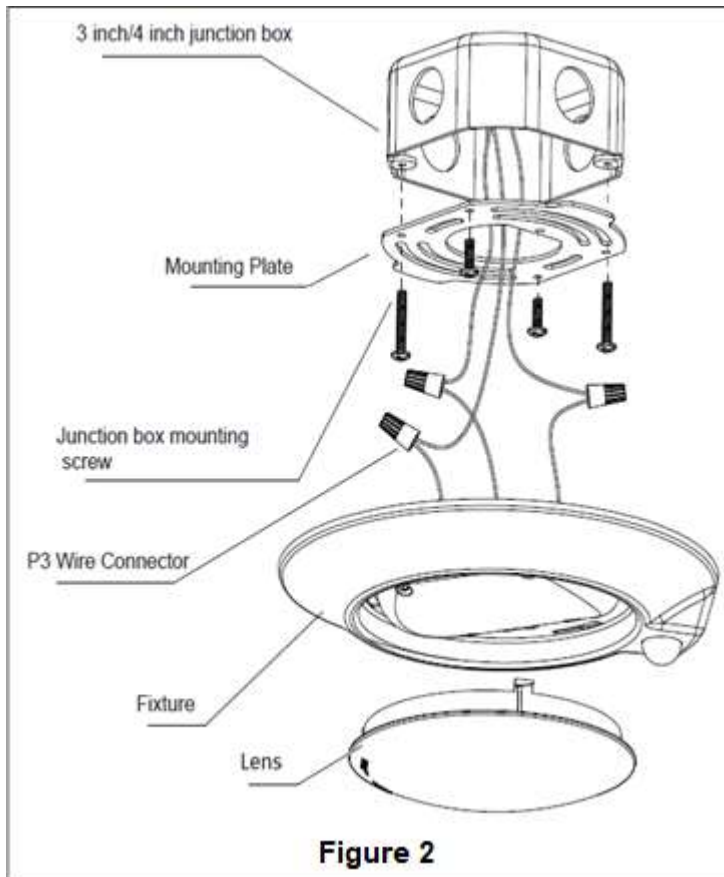

4. Connect fixture wires to input power using the supplied wire connectors. (White to white, black to black and green to ground)
5. Remove the lens by twisting slightly towards counterclockwise.
6. Orient the fixture to point towards the area detection is needed (i.e., toward the doorway in a closet). Mount the fixture to the short mounting screws (installed in step 3) using the keyhole mounts on the fixture.
7. Remove fixture from mounting screws and tighten the mounting plate to the junction box, making sure not to move the plate.
8. Attach fixture to the mounting screws and tighten until snug.
9. Reattach the lens.
10. Turn power on and make sure the light turns on when motion is detected.

****NOTE: THESE INSTRUCTIONS DO NOT ADDRESS ALL PERMUTATIONS THAT MAY EXIST IN INSTALLATION, MAINTENANCE, AND OPERATING ENVIRONMENT.**