



LED RED EXIT BATTERY BACKUP

SUGGESTED APPLICATIONS

- Emergency lighting for office, industrial, retail and other public spaces

FEATURES

- 120/277V dual voltage operation
- Red EXIT letters - 6" height and 3/4" stroke
- High-impact, 5VA flame retardant thermoplastic ABS housing
- Ceiling, wall, or side mounting capability (canopy included)
- Test switch and AC supply indicator
- Removeable knockout chevron directional arrows
- Battery backup with accessible test button for 90 minutes of illumination during a power outage
- Suitable for damp locations
- Meets NFPA 70, NFPA 101, UL924, NEC and OSHA standards



**INPUT VOLTAGE: 120/277V
(DUAL VOLTAGE)**

FREQUENCY: 50/60 Hz

DIMMABILITY: NO

AVG. RATED LIFE: 500 USES

DAMP LOCATION

**CONSTRUCTION:
THERMOPLASTIC**

RECHARGE TIME: 24 HRS

RUNTIME: >= 90 MINUTES

UNIT WEIGHT: 2.2 LBS

**BATTERY BACKUP:
NI-CAD 2.4V 300mA**

**AMBIENT OPERATING
TEMPERATURE: 50°F TO 104°F**

**ENERGY USED IN
MAINTENANCE MODE: 2.5W**



**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

800-666-2852 | TOPAZ-USA.COM

©2022 Southwire Company, LLC. All rights reserved.
*Registered Trademark & ™Trademark of Southwire Company, LLC.




TOPAZ[®]



A Southwire Company

LED RED EXIT BATTERY BACKUP

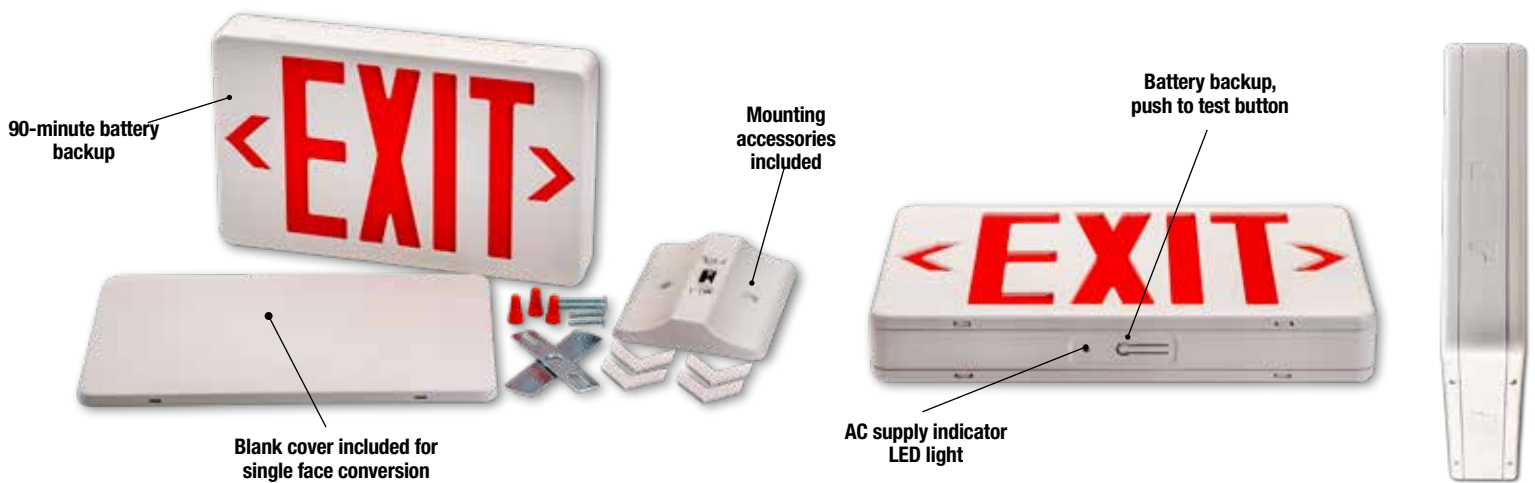

ITEM SPECIFICATIONS | ORDER INFO

MODEL #	ORDER CODE	UPC	MOUNTING	DIMENSIONS	PK-QTY
ES/LED/RW/B	75119	751338033481	WALL, SIDE OR CEILING	11.8" X 1.8" X 7.3"	12-PK

NOMENCLATURE

Example: ES/LED/RW/B

ES	LED	RW	B
EXIT SIGN	LED	RED LETTERS, WHITE HOUSING	BATTERY BACKUP

NOTES

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers. Visit www.topaz-usa.com for up-to-date dimmer compatibility information. Specifications subject to change without notice.

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

800-666-2852 | TOPAZ-USA.COM

©2022 Southwire Company, LLC. All rights reserved.
*Registered Trademark & ™Trademark of Southwire Company, LLC.