

NYC Approved LED Emergency Light



90 minutes of Uninterrupted Power

City of New York approved heavy duty emergency lighting units are highly efficient and easy to install. These self-contained units with sturdy steel design meet the requirements of all five boroughs of New York City. Emergency units are OSHA compliant and contain long lasting Ni-Cad battery backup for essential illumination during a power outage.

FEATURES

- 120/277V dual voltage operation
- 1W glare-free adjustable LED lamp heads
- 20-gauge steel housing with white powder coating
- Easy knockout holes for wall mount installation
- Test switch and AC supply indicator
- Battery backup with accessible test button for 90 minutes of illumination during a power outage
- Suitable for damp locations
- Meets UL924, NFPA 101, NEC and OSHA standards

APPLICATIONS

- Emergency lighting for office, industrial, retail and other public spaces






Job Name/Title: _____ Catalog Number _____

Contractor: _____ Notes: _____

NYC Approved LED Emergency Light

GENERAL SPECIFICATIONS

- Input Voltage:** 120/277V (dual voltage)
- Frequency:** 50/60 Hz
- CRI:** 80
- Dimmability:** No
- Avg. Rated Life:** 500 uses
- Wet / Damp / Dry Location:** Damp
- Construction:** Steel
- Recharge time:** 24 hrs
- Runtime:** >= 90 minutes
- Unit Weight:** 6.69 lbs
- Battery Backup:** EL2/LED/WH-NYC, 3.6V, 1000mA Ni-cad
EL3/LED/WH-NYC, 3.6V, 800mA Ni-cad 9 (x2)
- Ambient Operating Temperature:** 50°F to 104°F

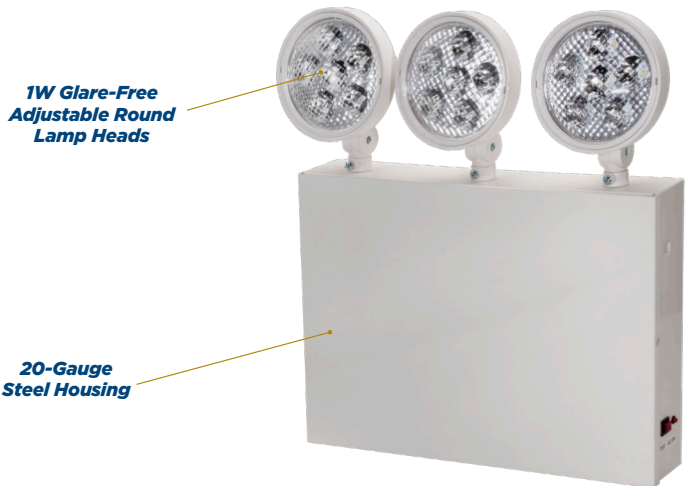

SPECIFICATIONS / ORDER INFO

Catalog Number	Order Code	UPC	Mounting	Watts	Lumens	Lumens Per Watt	Dimensions	Pk-Qty
EL2/LED/WH-NYC	75110	751338031845	Wall or side mount	1 watt per head	100 per head	100	14.5" x 2.4" x 16.5"	3-PK
EL3/LED/WH-NYC	75112	751338031852	Wall or side mount	1 watt per head	100 per head	100	14.5" x 2.4" x 16.5"	3-PK

NOMENCLATURE

Example: EL2/LED/WH-NYC
EL=Emergency Light 2 Heads / **LED**=LED / **WH**=White Housing / **NYC**=NYC Approved

©2019 Topaz Lighting Corp.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers. Visit www.topaz-usa.com for up-to-date dimmer compatibility information. Specifications subject to change without notice.