



# LED EXIT SIGNS - NYC APPROVED

## EDGE-LIT SURFACE MOUNT

### SUGGESTED APPLICATIONS

- Office, industrial, retail and other public spaces
- New York City applications

### FEATURES

- New York City approved
- Meets NFPA 70, NFPA 101, UL924, NEC/OSHA Standards
- Battery backup with accessible test button for 90 minutes of illumination during a power outage
- Clear, single face or mirrored, double face configurations available
- Configurable arrows
- Ceiling, wall, or side mounting capability



**INPUT VOLTAGE, FREQUENCY**  
**HZ: 120/277V, 60HZ**

**EMERGENCY BACKUP: YES**

**EMERGENCY DURATION /**  
**RUN TIME: 90 MINUTES**

**RECHARGE TIME : 24 HOURS**

**RECYCLE TIMES: 500 CYCLES**

**MOUNTING HEIGHT:**  
**7.5 FT TO 15 FT**

**LOCATION RATING: DAMP**

**AMBIENT OPERATING**  
**TEMPERATURE : 50°F TO 104°F**

**BATTERY TYPE: 4.8V NI-CAD1**



**BUILT FOR DURABILITY.**  
**BUILT FOR RELIABILITY.**  
**BUILT FOR WORK.™**

**800-666-2852 | SOUTHWIRE.COM**

©2024 Southwire Company, LLC. All rights reserved.  
\*Registered Trademark & ™ Trademark of Southwire Company, LLC.



# LED EXIT SIGNS - NYC APPROVED

## EDGE-LIT SURFACE MOUNT



### ITEM SPECIFICATIONS | ORDER INFO

MODEL #	ORDER CODE	UPC	INPUT VOLTAGE	WATTAGE	LUMINANCE (AVG)	LETTER COLOR	PANEL TYPE	NUMBER OF FACES
ESEL/SFS/RCL/B-NYC	71096	751338035720	120/277V	3W	Avg. 41 cd/m <sup>2</sup>	Red	Clear	Single Face
ESEL/DFS/RMR/B-NYC	71098	751338035744	120/277V	3W	Avg. 36 cd/m <sup>2</sup>	Red	Mirrored	Double Face


### ORDERING GUIDE

EXAMPLE: ESEL-SFS-RCL-B-NYC

PRODUCT	NUMBER OF FACES	LETTER COLOR	PANEL TYPE	EM TYPE	APPLICATION
ESEL = Exit Sign Edge-Lit	SF = Single face DF = Double face S = Surface Mount	R = Red	CL = Clear MR = Mirrored	B = Battery Backup	NYC = NYC Approved

### DIMENSIONS | WEIGHT

MODEL #	A (IN)	B (IN)	C (IN)	WEIGHT (LBS.)	PALLET QTY
ESEL/RXS/RXX/B-NYC	14.6	11.6	1.6	3.24	96

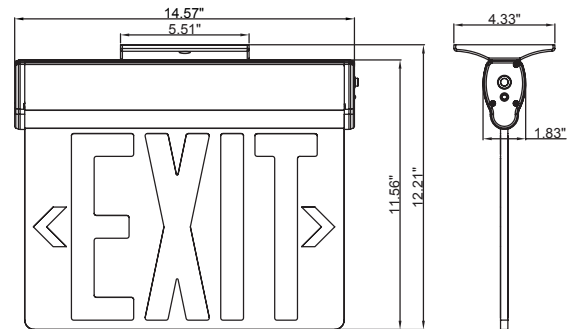

### NOTES

On all Exit and Emergency fixtures the battery will be prorated for 5 years. Specifications subject to change without prior notice. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**WARNING:** Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

**BUILT FOR DURABILITY.  
BUILT FOR RELIABILITY.  
BUILT FOR WORK.™**

800-666-2852 | SOUTHWIRE.COM

©2024 Southwire Company, LLC. All rights reserved.  
\*Registered Trademark & ™Trademark of Southwire Company, LLC.