

CONCRETE RINGS

2-1/2" & 3-1/2" DEEP - WITH CONDUIT KNOCKOUTS

FEATURES

- Extra long external mounting tabs allow easy installation by nailing or screwing the boxes to wooden or steel concrete forms
- Knockouts are sealed against box surface to prevent concrete slurry and water from entering the box
- The top covers are removable allowing any before-pour work (sold separately)

APPLICATIONS

- Masonry boxes are used as a junction box or to secure a wiring device in masonry block construction
- 2-1/2" deep boxes are used in 4" block walls, 3-1/2" deep boxes are used in 6" or 8" block walls
- Gangable masonry boxes allow installer to construct a box to hold multiple devices


STANDARD MATERIAL

Galvanized steel

CERTIFICATIONS

UL Listed



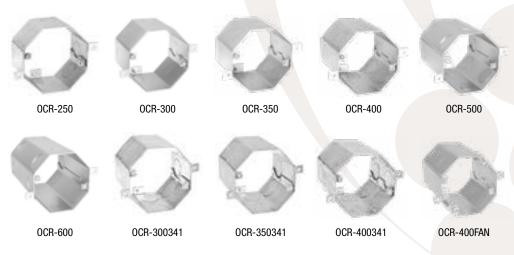



0CR-200



CONCRETE RINGS

2-1/2" & 3-1/2" DEEP - WITH CONDUIT KNOCKOUTS

PART #	DESCRIPTION	K.O. Pattern Fig #	RING DEPTH	KNOCKOUTS	CUBIC	MASTER QTY.
				SIDE CONDUIT	INCHES (CM ³)	
0CR-200	1/2" & 3/4" KO'S	1	2"	(4) 1/2" & (4) 3/4"	24.5 (401.4)	10
0CR-250		1	2-1/2"	(4) 1/2" & (4) 3/4"	30.8 (504.7)	10
0CR-300		1	3"	(4) 1/2" & (4) 3/4"	37.0 (606.3)	10
0CR-350		2	3-1/2"	(8) 1/2" & (8) 3/4"	43.0 (704.6)	20
0CR-400		2	4"	(8) 1/2" & (8) 3/4"	49.3 (807.8)	5
0CR-500		2	5"	(8) 1/2" & (8) 3/4"	61.5 (1007.8)	5
0CR-600		2	6"	(8) 1/2" & (8) 3/4"	74.0 (1212.6)	5
OCR-300341	3/4" & 1" KO'S	1	3"	(4) 3/4" & (4) 1"	37.0 (606.3)	10
OCR-350341		2	3-1/2"	(8) 3/4" & (8) 1"	43.0 (704.6)	5
OCR-400341		3	4"	(8) 3/4" & (8) 1"	49.3 (807.8)	5

PART #	DESCRIPTION	RECOMMENDED MAX LOAD RATINGS		КО	KNOCKOUTS	CUBIC	MASTER
		CEILING FAN (DYNAMIC) LBS.	FIXTURE (STATIC) LBS.	PATTERN FIG#	SIDE CONDUIT	INCHES (CM ³)	QTY.
OCR-400FAN	1/2" & 3/4" KO'S, CEILING FAN/LIGHT FIXTURE SUPPORT	35	75	2	49.3 (807.8)	(8) 1/2" & (8) 3/4"	5