



Southwire™

BASE SPACERS

FEATURES

- Proven base plate design maintains consistent vertical separation between trench floor and first duct tier
- Two-piece interlock design eliminates banding
- Resistant to extreme temperature fluctuations
- Available in 16 sizes
- Snap lock design for fast field assembly
- Stays firmly in place during fill
- Heavy duty strut evenly distributes load

APPLICATION


- Support duct arrays within trenching before encasement
- For use with Southwire Intermediate Spacers

STANDARD MATERIAL

- High impact polymers



1347

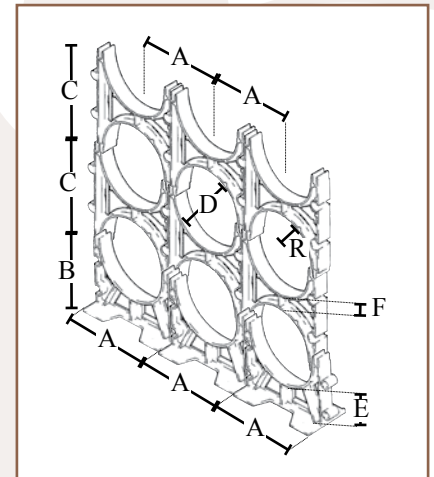

PART #	SPACER SIZE	MASTER QTY.	WEIGHT/CASE (LBS.)	A	B	C	D	E	F	R
1347	4 X 1"	250	50	5.63"	4.06"	5.63"	4.63"	3"	1"	2.315"
1348	2 X 1-1/2"	450	65	3.975"	4.25"	3.985"	2.50"	3"	1.50"	1.25"
1349	3 X 1-1/2"	250	48	5.13"	4.81"	5.13"	3.63"	3"	1.50"	1.815"
1350	4 X 1-1/2"	180	47	6.13"	5.315"	6.13"	4.63"	1.75"	1.50"	2.315"
1351	5 X 1-1/2"	140	43	7.325"	5.90"	7.325"	5.69"	3"	1.50"	2.845"
1352	6 X 1-1/2"	100	33	8.23"	6.375"	8.25"	6.75"	3"	1.50"	3.375"
1353	2 X 2"	325	48	4.46"	4.25"	4.46"	2.50"	3"	1.50"	1.25"
1354	3 X 2"	225	44	5.63"	4.81"	5.63"	3.63"	3"	2"	1.815"
1355	4 X 2"	180	47	6.61"	5.315"	6.63"	4.63"	3"	2"	2.315"
1356	5 X 2"	100	32	7.833"	5.90"	7.83"	5.69"	3"	2"	2.845"
1357	6 X 2"	100	34	8.73"	6.375"	8.73"	6.75"	3"	2"	3.375"
1358	2 X 3"	300	48	5.465"	4.255"	5.46"	2.50"	3"	3"	1.25"
1359	3 X 3"	190	41	6.63"	4.81"	6.63"	3.63"	3"	3"	1.815"
1360	4 X 3"	150	43	7.61"	5.315"	7.625"	4.63"	3"	3"	2.315"
1361	5 X 3"	90	30	8.69"	5.90"	8.69"	5.69"	3"	3"	2.845"
1362	6 X 3"	90	32	9.79"	6.375"	9.75"	6.75"	3"	3"	3.375"

Rev. 0, 03/23

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

1-855-798-6657 | SOUTHWIRE.COM

©2023 Southwire Company, LLC. All rights reserved.
*Registered Trademark & ™Trademark of Southwire Company, LLC.