

## LED PAR38 Lamp CCT SELECTABLE



### SUGGESTED APPLICATIONS

- High efficiency replacement for incandescent lamps
- Ideal for residential, commercial, hospitality, general lighting, recessed downlighting and task lighting
- Suitable for both open and enclosed fixtures

### FEATURES

- 5 CCT Selectable: 2700K, 3000K, 3500K, 4000K and 5000K
- Simple selector switch on lamp body
- Up to 85% energy savings
- Dimmable down to 10%
- Durable plastic construction, prismatic lens



## LED PAR38 LAMP CCT SELECTABLE

### GENERAL SPECIFICATIONS

**Input Voltage/Frequency:** 120, 60Hz  
**Power Factor, THD %:** 0.7, <20%  
**Input Current:** 160mA  
**Minimum CRI:** 80  
**Beam Angle:** 40°

**Functional Life (L70):** 15,000 hours  
**Ambient Operating Temperature:** -4°F to 104°F  
**CBCP (cd):** 2,670  
**Durable construction, prismatic clear plastic**  
**Dimmable**

### ITEM SPECIFICATIONS / ORDER INFO

Catalog Number	Order Code	Base	Max Lumens	Wattage	Efficacy (LPW)	CCT
LP38-14W-CTS-FL-D	73666	E26	1,200	14W	86	2700K 3000K 3500K 4000K 5000K

### NOMENCLATURE

LP38 = Lamp PAR38 Shape 14W = 14 Watt CTS = Color Temperature Selectable 2700K|3000K|3500K|4000K|5000K D = Dimmable


### ENERGY SAVINGS

Based on 12 hours/day and \$0.11/kWh

Catalog Number	LED Wattage	Incandescent Replacement Wattage	Wattage Saved	Yearly Savings	5 Year Savings
LP38-14W-CTS-FL-D	14W	120W	106W	\$51	\$255

### DIMENSIONS/WEIGHTS

Catalog Number	(A)	(B)	Weight
LP38-14W-CTS-FL-D	5.08"	4.46"	0.57 Lbs.

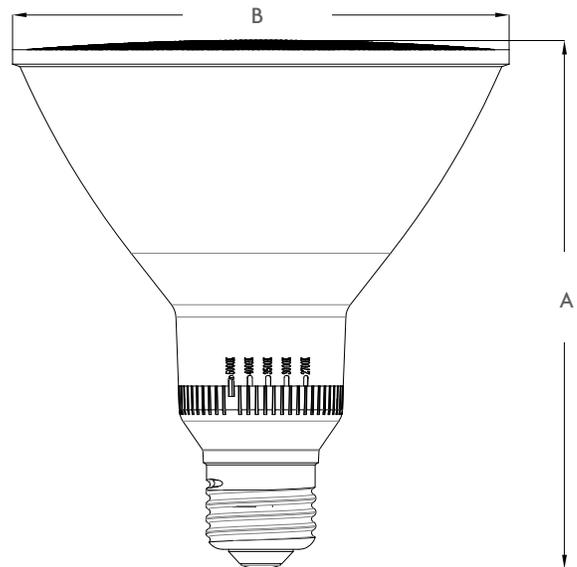

### NOTES

Not for sale in California

Dimming - This product is designed to be compatible with most leading-edge type incandescent and LED style dimmers. (Dimming range 100% down to 10%). Product performance may vary depending on dimmer manufacturer and circuit loading. Visit [www.topaz-usa.com/led-dimmer-compatibility](http://www.topaz-usa.com/led-dimmer-compatibility) for up-to-date dimmer compatibility information.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

THREE (3) YEAR LIMITED WARRANTY: SOUTHWIRE COMPANY, LLC: For details visit: [www.topaz-usa.com/warranty](http://www.topaz-usa.com/warranty)

Specifications subject to change without notice.

Rev. 0, 01/22