

4" LED Recessed Can

Remodel Construction IC Air Tight

RH4/RLED/IC/AT

Product Specifications

Features Quick Connect for use with LED Trim Module

Thermal Protector

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation

Remodel Clips


Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials



Installation

Junction Box

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief

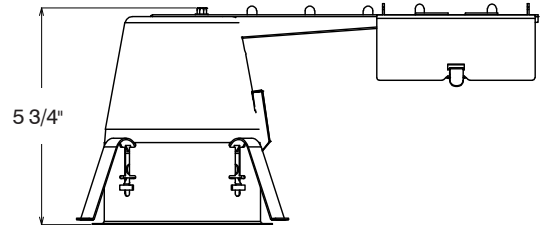


Labels and Listings

cULus Listed for Feed Through Wiring
Certified under ASTM - E283 for Air Tight Construction



Product Code: 79991
Item # RH4/RLED/IC/AT

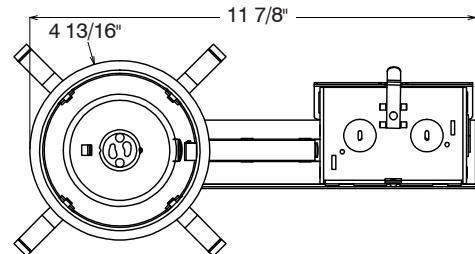

Specifications Subject To Change Without Notice

Series	Aperture Size	Lamp Orientation	Construction	Lamp Style	Insulation Contact	Airtight	Voltage	Options
RH= Recessed Housing	4	Blank=Vert	R=Remodel	Blank=Incand.	Blank=Non-IC	Blank=Non-AT	Blank=120	Any Modifications
	5	H=Hor	N=New	C=CFL	IC=IC	AT=AT	H=120/277	
	6			G=GU LED=LED LV=Low Voltage				